

With the compliments of:



**Cantex Ergo:**

Rating: 1000 W  
Design types: 120/230 V  
RPM: 10'000 rev/min  
Cutter: Cutter head with  
3 HW-Reversing knives  
45 × 12 × 1.5 mm  
Weight: 4.3 kg  
Art. No. 111857



**Plano 45 S2:**

Rating: 1000 W  
Design types: 120/230 V  
RPM: 10'000 rev/min  
Cutter: Cutter head with  
3 HW-Reversing knives  
45 × 12 × 1.5 mm  
Weight: 4.1 kg  
Art. No. 111851



**Scope of supply:**

Machine, complete  
Set of tools  
Operating instructions  
Solid wooden case

**Optional accessories:**

Suction set 30, inside  $\varnothing = 30$  mm  
(3 m hose + adapter piece)  
Art. No. 121815  
Reducer 54/58 mm  
Art. No. 331805  
Parallel guide stop for Cantex Ergo  
Art. No. 121290  
HW-Reversing knives;  
45 × 12 × 1.5 mm (Set of 3)  
Art. No. 131822

**Product guarantee:**

1 year in case of malfunction due  
to improper manufacture or defective  
materials

**Guarantee of parts availability:**

10 years for spare parts and  
accessories from last date of  
manufacture

**Lamello**

Producer:

**Lamello AG**  
**Verbindungstechnik**  
Hauptstrasse 149  
CH-4416 Bubendorf  
Tel. +41 (0)61 935 36 36  
Fax +41 (0)61 935 36 06  
E-Mail info@lamello.com  
www.lamello.com

**Lamello**

# Cantex Ergo/Plano 45 S2

The flush milling machines  
of the highest quality standard

Flush milling of wooden or synthetic edges,  
edge banding or face frames

Cantex Ergo







# Cantex Ergo

**Special helical milling geometry facilitates "pulling" cut (shearing cut)**

Guaranteed tear-free work

**Low cutting pressure**

No chipping at the end of the edge

Perfect cut even on crossgrained wood

**Cutter head with 3 Carbide insert knives (reversible for two sided use)**

Easy and accurate knife changes without a setting gauge

Cost-effective tool usage thanks to long life

**Detachable Nylon Platen-Gib**

Removal design allows easy cutting entry into edge bands

Flush milling through corners

With Nylon Platen-Gib for flush milling of projecting parts in the middle of a surface

**Parallel guide stop (Optional accessories)**  
For flush milling edge bands on materials with synthetic resin surface (i.e. melamine or HPL) without damaging the surface

With a quick set stop and a micro adjustment

**Special coating of the supporting plate (Standard)**  
Provides an optimized sliding surface and prevents marring of the substrate surface

**Equipped with the successful Step Memory System (rep. pat.)**

Milling height easily and quickly adjusted in steps of 0.035 mm (.0014" = 1.4/1000" per click)

**Ergonomically improved and repositioned switches and grips**

For a safe and ergonomic way of work



**Swivel vaccum stub**

For a flexible dust ejection and easy handling

Suitable vaccum equipment available as accessories

**Elevated machine support**

To protect the work surface and milling machine when it is running down or not in use

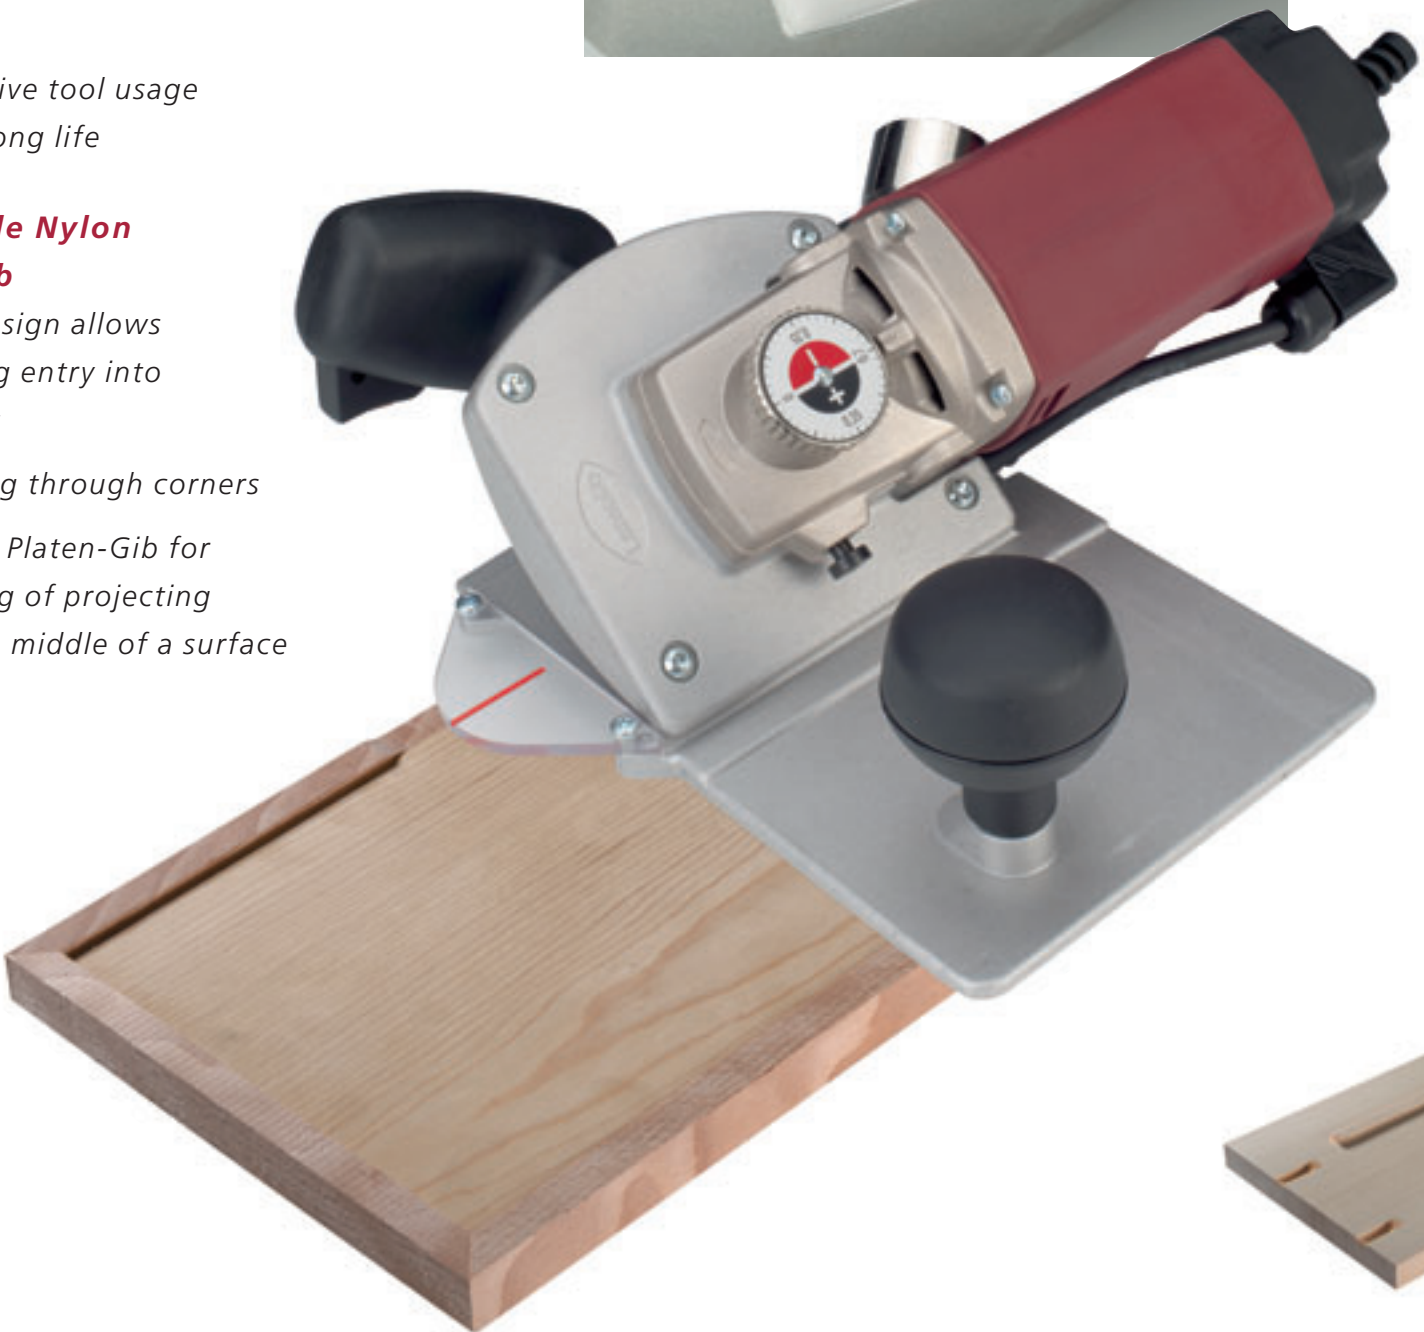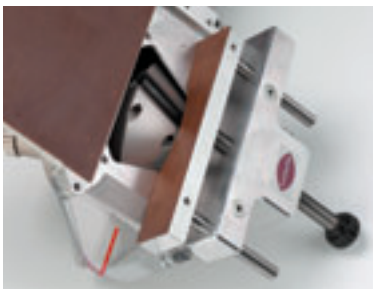

## Plano 45 S2

Flush Mill projecting parts of wood, resin-gall patches, patching rods, knots and crossbar patches

**Adjustable handgrip**

Designed for safe and accurate machine control during operation

**Milling width 45 mm**

Designed to our specifications set in the Lamello Minispot System

