

MAX

®

BUILDING OUR WORLD

SuperRoofers CN445R3


drives 3/4" to 1-3/4" coil nails



FEATURES

● Dial adjustable depth control

Dial depth control requires no special tools, providing accurate depth control for softest shingle to the hardest wood. No need to make any adjustments at the compressor.



● Nose magnet

Holds the last nail of the coil, preventing waste and jamming.




● Powerful Driving Power



OTHERS

MAX

● Full round driver blade




OTHERS

MAX

● Tar resistant nose (Patent pending)

The nose of the CN445R3 is designed to resist tar four times longer than conventional tools.




Contact foot

Contact foot


● Unique tangle free swivel fitting

No more fighting with heavy hoses, no matter what angle the nailer is being held.



● Maintenance free end cap filter (US Patent 5637125)

It prevents foreign substances from entering the tool. Internal parts last longer and the inside of the tool is kept clean. The filter has a self-cleaning feature; foreign substances are ejected automatically from the tool when the air hose is disconnected.

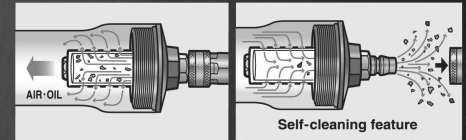

AIR-OIL

Self-cleaning feature

● Removable contact foot

Easy to remove and clean, inexpensive to replace.



● Rapid fire trigger valve

CN445R3 comes with a rapid trigger valve. The CN445R3 is the fastest roofer on the market with little recoil.



● Comfortable rubber grip ● Trigger lock for safety

Optional parts



- Vinyl Siding Kit (CN70433)
- Single Sequential Trigger Kit (CN80535)
- Anti-Double Fire Trigger Kit (CN81254)



Tangle Free swivel joint



Rapid fire trigger valve



End cap filter



Depth control



Nose magnet



Trigger lock lever



Tar resistant nose

APPLICATIONS

- Asphalt shingles ● Siding ● Box assembly ● Cement board

TOOL SPECIFICATIONS

MODEL	CN445R3
WEIGHT	5.2 lbs
DIMENSIONS	10 - 1/2" (H) x 4 - 1/2" (W) x 12 - 3/16" (L)
LOAD CAPACITY	120 nails
OPERATING PRESSURE	70 - 100 psi (Regulator)
AIR CONSUMPTION	0.047ft ³ / cycle (90psi operating pressure)

FASTENERS APPLICABLE

ROOFING COIL NAILS



Shank type: Smooth, Ring

Head diameter
.413"

Nail length

3/4"

1-3/4"

Shank diameter
.120"

The specifications and design of the products in this catalog will be subject to change without advance notice due to our continuous efforts to improve the quality of our products.

MAX USA CORP.

257 East 2nd Street Mineola, NY 11501

TEL: 800-223-4293 FAX: 516-741-3272

www.maxusacorp.com



Dealer