

18V X2 LXT® Lithium-lon (36V) Brushless 6-1/2" Plunge Circular Saw Kit Model XPS01PTJ

Delivers A Splinter-Free Mirror Finish Wherever the Application May Be



ACCURACY

Dual front and rear bevel supports provide additional rigidity for precise and accurate bevel cuts



SPEED

Variable speed control dial (2,500 - 6,300 RPM) for optimum performance in a variety of materials




CONTROL

Easy to set depth adjustment with large scale



DESIGN

Slide lever on base engages the guide rail (sold separately) when bevel cutting for stability

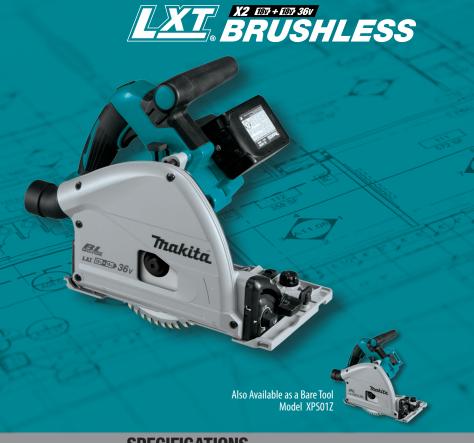

FEATURES

- Powered by two LXT® batteries; X2 LXT® technology delivers more power, speed and run time without the hassles of a cord
- Makita built electronically controlled BL $^{\text{TM}}$ Brushless Motor delivers 6,300 RPM for maximum performance and 50% longer run time per charge
- Automatic Speed Change $^{\text{TM}}$ technology adjusts cutting speed and torque during cut for optimum performance
- Soft start feature for smooth start-ups
- Bevel capability (-1° to 48°) with positive stops at 22.5° and 45°
- Electric brake for maximum productivity
- On-board hex wrench for fast and easy blade changes
- Built-in depth stop allows a preliminary first cut of 2 to 3mm to be performed prior to cutting through the entire material for clean and splinter-free cutting
- 1-7/16" dust exhaust port (1-1/2" OD) directs material away from the operator; allows connection to a vacuum for improved dust collection

SPECIFICATIONS

Blade Diameter	6-1/2"
Arbor	13/16"
Max. Cutting Capacity (at 90°)	2-3/16"
Max. Cutting Capacity (at 45°)	1-9/16"
No Load Speed (variable speed)	2,500 - 6,300 RPM
Speed Settings	5
Battery	2X 18V LXT® Lithium-Ion
Overall Length	13-5/8"
Net Weight (with battery)	11.2 lbs.
UPC Code	088381-851190

STANDARD EQUIPMENT

- (2) 18V LXT® Lithium-Ion 5.0Ah Battery (BL1850B)
- 18V LXT® Lithium-Ion Dual Port Charger (DC18RD)
- 6-1/2" Carbide-Tipped Saw Blade
- Hex Wrench (783203-8)

OPTIONAL ACCESSORIES

- Rail Clamp Set, 2-Pc. (194385-5)
- 55" Guide Rail (194368-5)
- 118" Guide Rail (194367-7)
- Guide Rail Connector, SP6000J (P-45777)
- 55" Splinter Guard Replacement Strip (194418-6)
- 118" Splinter Guard Replacement Strip (194419-4)
- 32.8 ft. Non-Slip Replacement Strip (194417-8)

All specifications subject to change without prior notice. All models and accessories subject to stock on hand.
The Makita Teal Color is the trade dress of Makita Corporation and is protected under common law and registered with the U.S. Patent and Trademark Office

Makita offers a wide variety of accessories. For a complete listing, please refer to the Makita General Catalog or visit our website at makitatools.com, or call 1-800-4MAKITA.